


Wiring Diagram

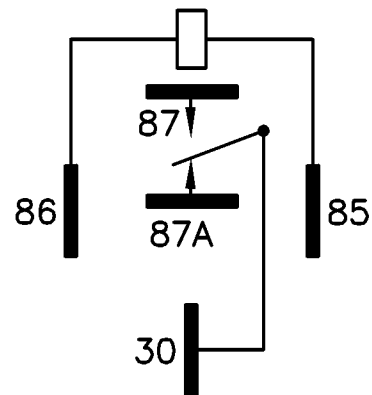

Nominal Voltage	24 Vd.c.
Coil Resistance	350±10% Ω
Pick-up Voltage	≤15.6 Vd.c.(20℃)
Drop-out Voltage	≥2.4Vd.c.(20℃)
Contact Material	AgSnO ₂ In ₂ O ₃
Contact voltage drop	≤100 mV (13.5 Vd.c., 10 A)
Contact Rating	NO/NC 30/20A, 24Vd.c. (Res. load)
Electrical life	1X10 ⁵
Mechanical life	1X10 ⁷
Insulation Resistance	≥100 MΩ, 500 Vd.c.
Dielectric Strength	500 Va.c., 1 min
Ambient temperature	-40℃~85℃
Cover color	Black
Termination	Plug-in

Type M4	Date	2007·07·18	PROJECTION 	TITLE M4/024-1Z2G	
	Design	zhuweisi			
	Check	chenminxiao	SCALE 2:1		
Size	A3	Approve	huzhongrui		0